	PMG 4000PH
Power [kW]	4000
Speed [rpm]	60
Voltage [V]	400
Short Circuit Current [A]	8065
THD	0.76
Power factor	0.92
Weight [kg]	1940
Efficiency [100% load]	97.2
Efficiency [75% load]	96.7
Efficiency [50% load]	96
Efficiency [25% load]	95.2
Protection class	IP54
Insulation class	F
Thermal class	B
Torque [N.m]	33804
Cooling	Air-to-liquid

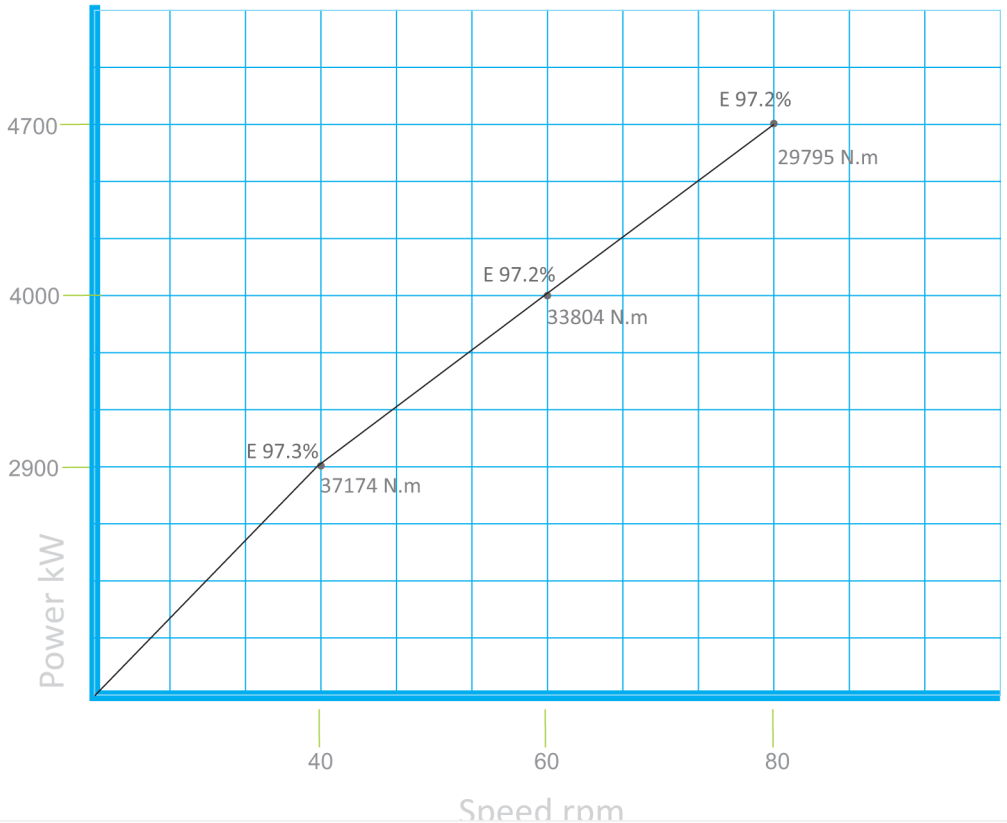

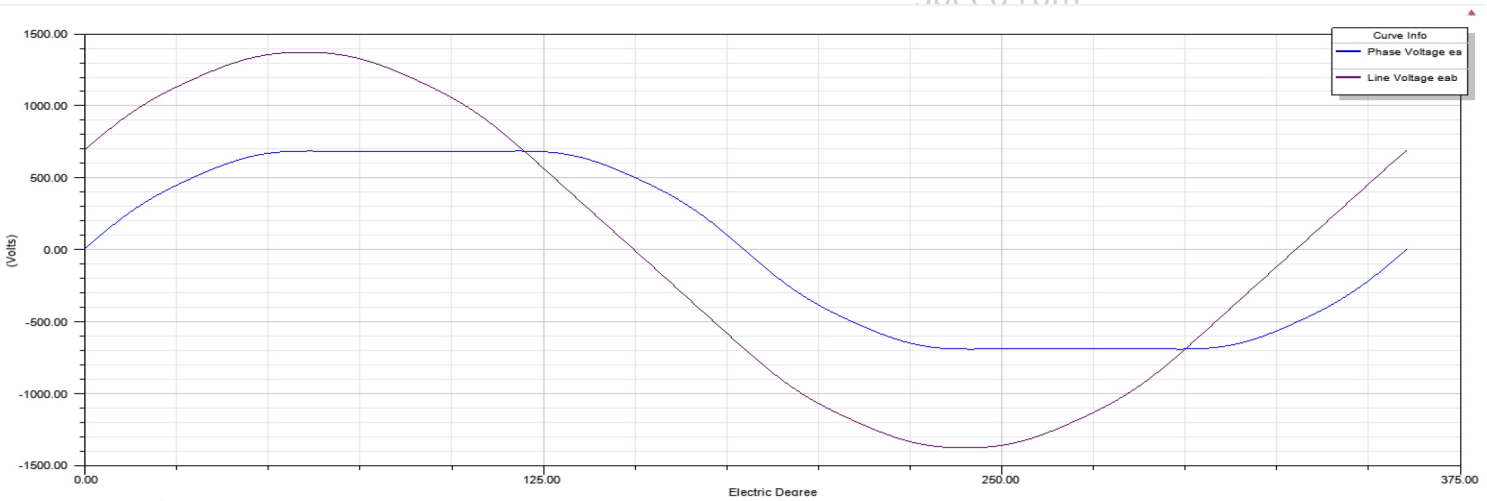

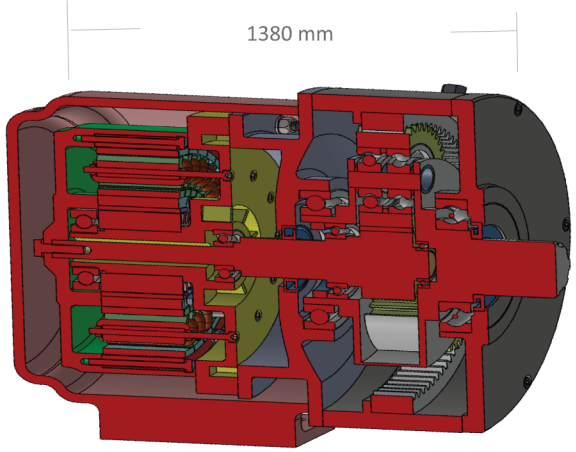

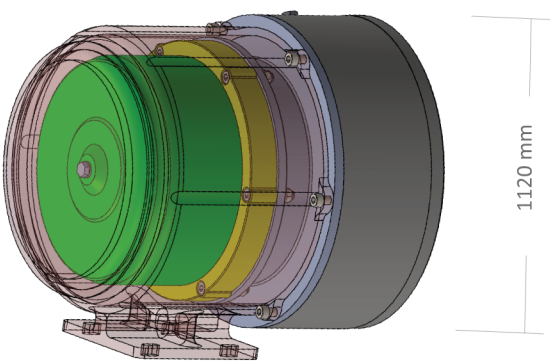

PMG 4000PH

© 2016 HYDROSYST Ltd
We reserve the right to modify the information above at any time without notice.